


Natural Gas Filters

FO-xxxG Series

Improved Natural Gas Filter/Separator
Performance

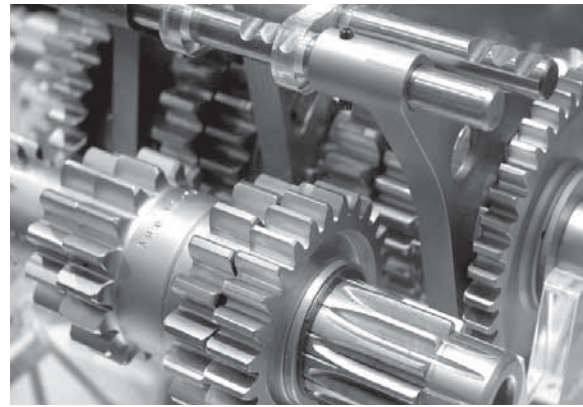

DESCRIPTION

Parker Velcon Model FO-436G and FO-472G gas filter cartridges have been designed to remove particulate and gross water from natural gas. Both sizes offer:

- Finer Filtration
- Gross Water Removal
- Proven Performance

SIMPLICITY

- The FO-436G and FO-472G have been designed for installations where superior performance features are desired over those offered by standard cartridges.
- High Collapse Strength – In lab tests, the FO-472G averaged > 100 psid collapse strength vs. 34 psid for a leading competitive cartridge.



Contact Info:

Parker Hannifin Corporation
Hydraulic & Fuel Filtration Division
1210 Garden of the Gods Road
Colorado Springs, CO 80907

phone 719 531 5855
fax 719 531 5690
vfsales@parker.com

www.velcon.com | www.parker.com

- Improved Filtration Efficiency – Multiple layers of fiberglass in graduated fiber diameters assure maximum efficiency by distributing collected particles evenly throughout the filter body. The fine fiberglass inner wrap assists in gross water removal.
- Positive Media Migration Barrier – An inner wrap of cellulose filtration material provides a positive media migration barrier.
- Improved Handling Characteristics – An outer wrap of resin coated fiberglass screen retains cartridge

shape and density through its useful life, protects against handling damage, and reduces the exterior dirt accumulation typical of fuzzy cotton or dacron stockinette coverings.

- Steel End Caps – Aluminized steel provides corrosion resistance while plastisol adhesive assures complete bonding of filter media to end caps.
- Buna Gaskets – Seal tightly to mounting stool and top seal plate.



ENGINEERING YOUR SUCCESS.

SPECIFICATIONS

- Heavy gauge aluminized steel center tube resists corrosion and gives 100 psi collapse strength. Louvered openings provide maximum flow distribution.
- Resin-impregnated cellulose barrier to stop fibers from migrating downstream.
- Resin-impregnated fiberglass media, arranged in progressively finer layers, to provide efficient, no channeling depth filtration.
- 200° maximum operating temperature.
- Outside-to-inside flow direction.
- 4-1/2" outside diameter, 3-3/8" inside diameter, 36" and 72" overall lengths.


CAPACITY VS. OPERATING PRESSURE

- Sized for 1 psi Differential Pressure across filter and centerpipe
- Specific gravity = 0.65
- Temperature = 60°F



MODELS AVAILABLE

Model	OAL (Inches)	Rating @ 99% Gravimetric Efficiency
FO-436G	35.75	1/2 micron
FO-436G5	35.75	1 micron
FO-436GA	35.75	2 micron
FO-436GC	35.75	5 micron
FO-472G	71.875	1/2 micron
FO-472GC	71.875	5 micron

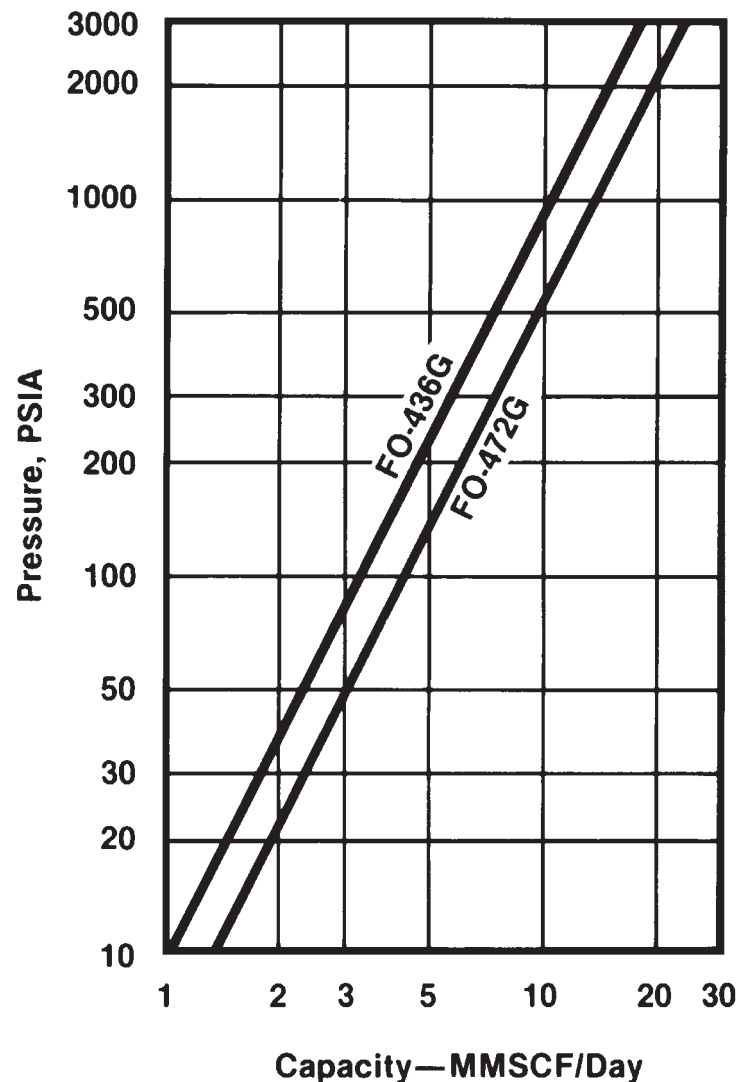

© 2016 Parker Hannifin Corporation. Product names are trademarks or registered trademarks of their respective companies. Due to Velcon's continuing product improvement, drawings, specifications and pictures are subject to change without notice.

VEL1364R11 0616



Parker Hannifin Corporation
Hydraulic & Fuel Filtration Division
 1210 Garden of the Gods Road
 Colorado Springs, CO 80907 USA
 tel +1 719 531 5855
www.velcon.com | www.parker.com